


Spektrum AR10100T 10 Channel Telemetry Receiver

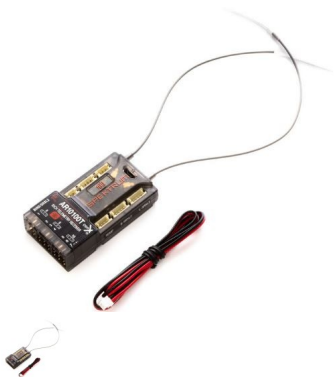

SPMAR10100T

Rating: Not Rated Yet
Price
Sales price R3165,00

[Ask a question about this product](#)

Manufacturer [Spektrum](#)

Description

The Spektrum AR10100T 10-Channel Receiver is a DSM2® and DSMX® capable receiver with a compact footprint to fit in a wide range of aircraft. Compact footprint to fit in a wide range of aircraft.

Full range telemetry, integrated barometer to provide altitude and vario telemetry data without additional purchase.

Features a bind button for easy binding with no plugs necessary.

Features a Micro USB connection for easy registration and updating with any micro USB cable using Spektrum's PC Programmer application.

What's new:

- 1) AR10100T DSMX 10-Channel Telemetry Receiver
- 2) Spektrum Flight Pack Voltage Sensor
- 3) Product Manual

NEEDED TO COMPLETE:

- 1) Telemetry Capable DSMX Transmitter

Seven telemetry(s) may be required.

FEATURES:

- Compatible with all Spektrum DSM2 and DSMX transmitters.
- Compact footprint fits into pusher, semi, open class and glider scale models.
- Features full range telemetry, integrated barometer to provide altitude and vario telemetry data without the need of additional sensors.
- DSM2, RPM and TCMP telemetry ports can be used with traditional Spektrum Telemetry Sensors.
- XBUS telemetry port for expandable telemetry capabilities, like GPS, Air Speed, Flight Battery Energy and more.
- Micro USB port for easy registration and firmware updating capability.
- Bind button allows for easy binding and eliminates the use of bind plug.
- Two external antennas will ensure secure RF coverage from all angles of the aircraft.
- Redundant RF path redundancy with up to 2 additional SRXL2 Remote Receivers, SPM9747 or SPM46511, sold separately.
- Ready to use with Spektrum Smart ESC, for one-wire telemetry data without the need of modules, links and wires.
- Bind pin output pins for easy and compact installation.
- Forward Programming Capable for setting individual falloff parameters per channel and more OVERVIEW.

The Spektrum AR10100T 10-Channel Receiver is a DSM2® and DSMX® capable receiver with a compact footprint to fit in a wide range of aircraft. It features a full range telemetry, integrated barometer to provide altitude and vario telemetry data without additional purchase. Included XBUS and temperature ports can be used as additional telemetry sensors available separately.

A user-friendly Micro USB port is built into the receiver for easy access to firmware updates via the Spektrum PC Programmer Application. The AR10360T it also features 2 SRXL2 ports for added SRXL2 Remote Receivers (SPM9747 or SPM46511), available separately, to add additional RF path redundancy. An SRXL2/Bnd servo leader is available to connect smart devices, bind with a traditional bind plug, or connect a battery. The AR10100T also features a bind button for easy binding with no plugs necessary and offers both SmartSafe™ technology and Hold-Lock as well as preset falloff types set through forward programming. Also, the throttle port is Smart ESC compatible right out of the box.

SPESCS:

- Range 2,400M
- Input Voltage 3.3V-5V
- Programmable Yes

Receivers: Spektrum AR10100T 10 Channel Telemetry Receiver

Dimensions 55 x 30 x 15mm (2.16 x 1.18 x 0.59 in)

Modulation DSMX/DSMR

Memory Yes

Red Master and Button

Range Full

Channels 10

Data Port Yes

Rechargeable Yes

Product Weight 15g

Water Resistant No

Antenna Length 7.327 (195 mm)

Technology Smart

Reviews

There are yet no reviews for this product.